


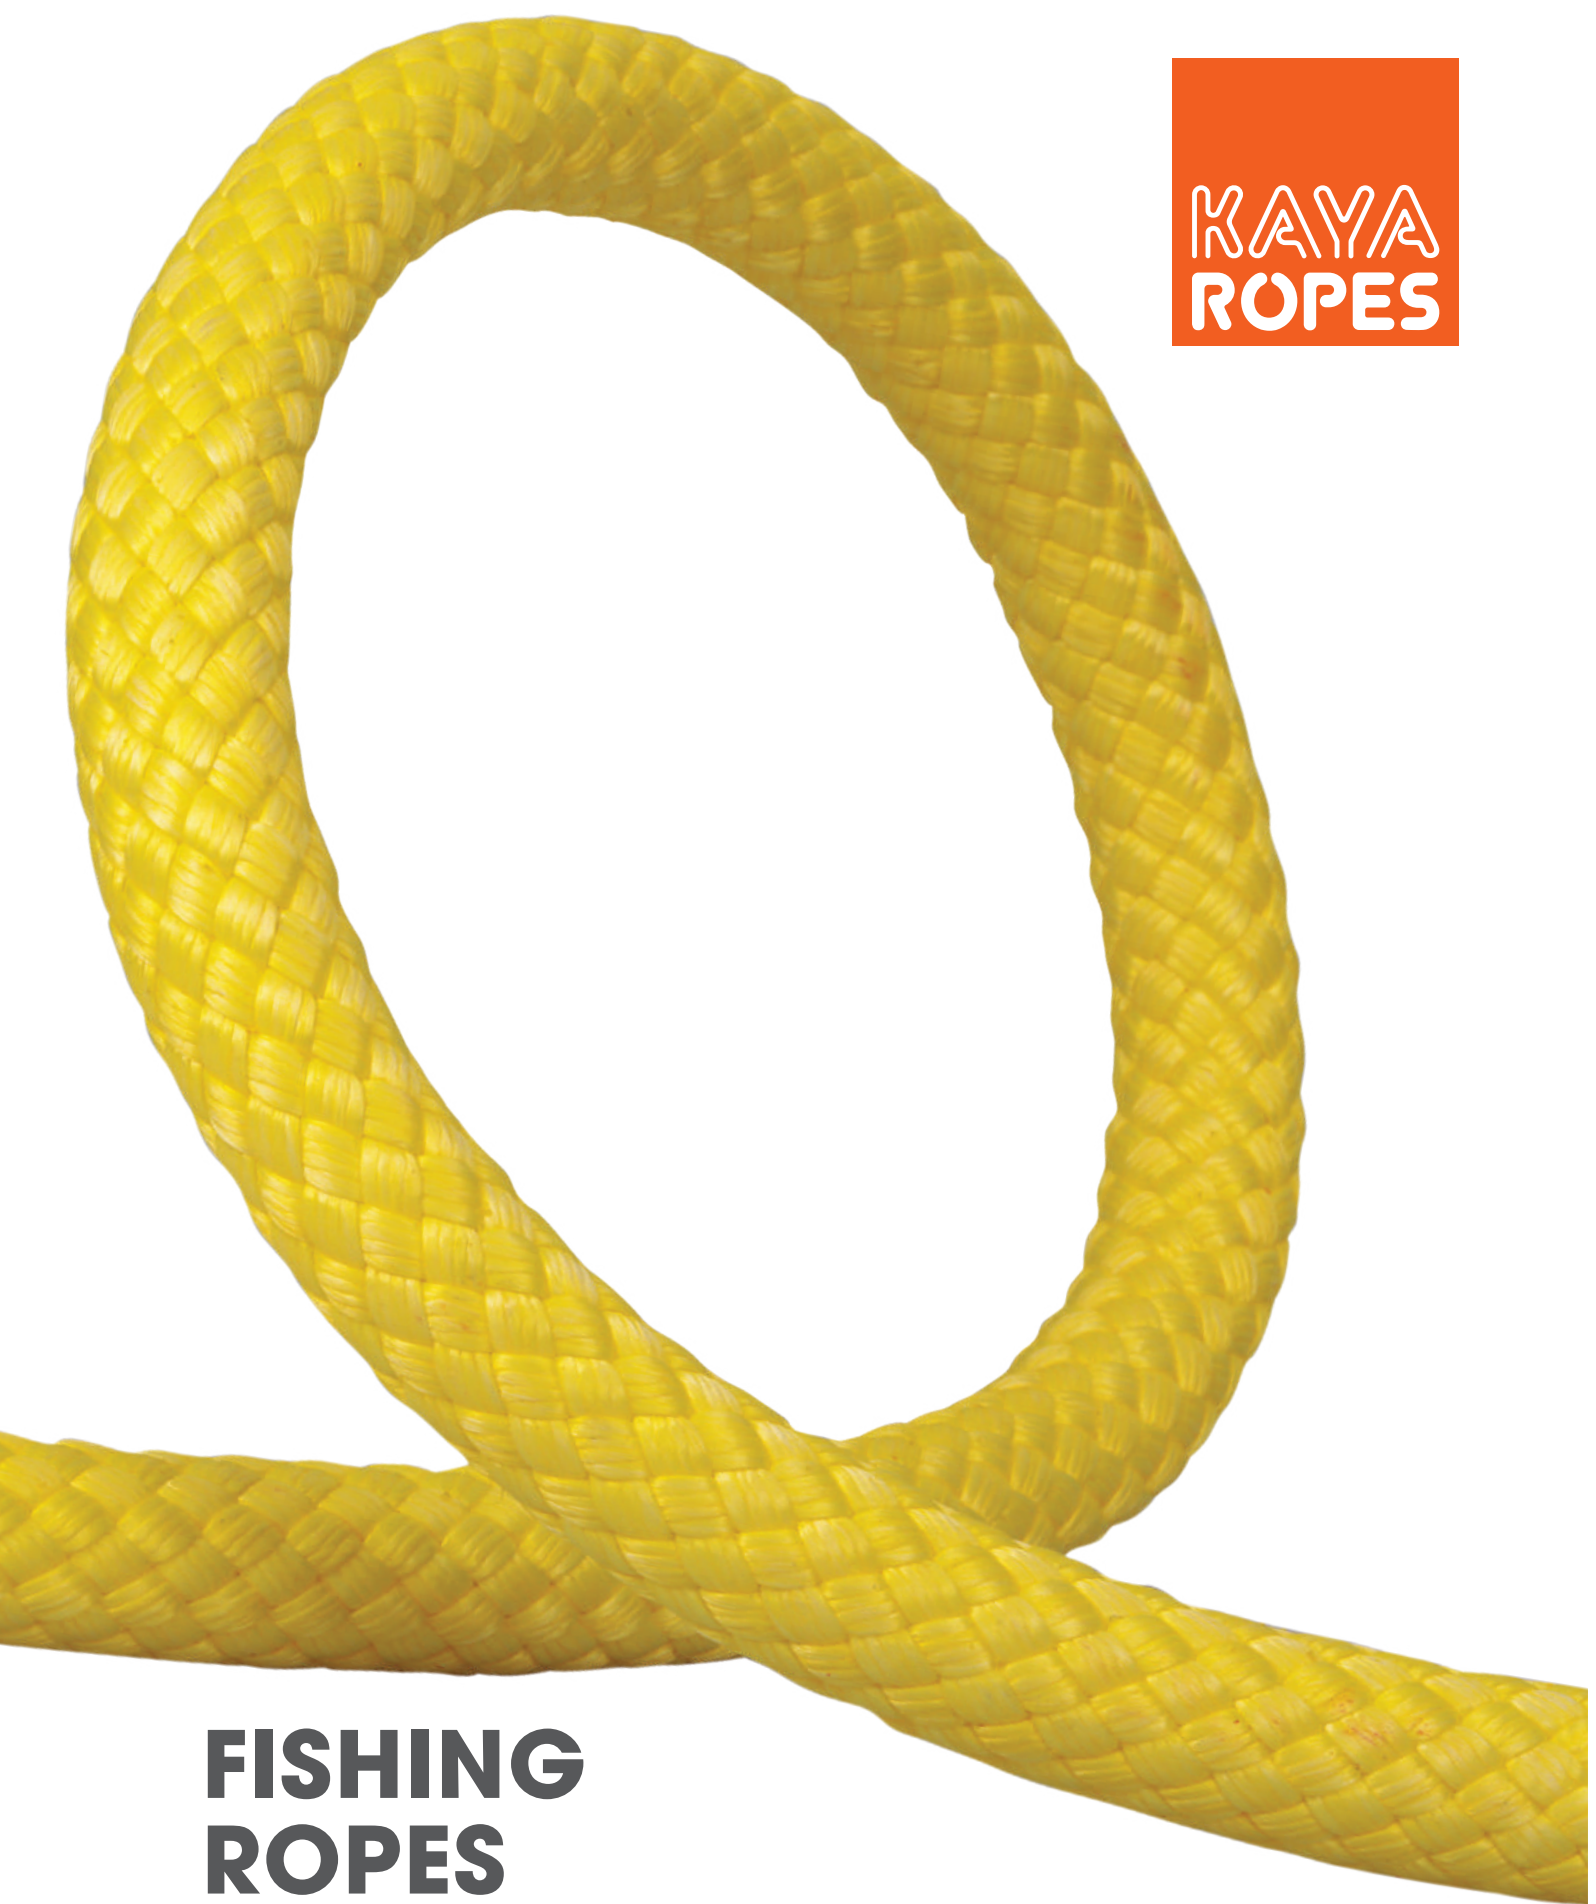

**KAYA
ROPES**

FISHING ROPES

2022 | ENG

Upgrade Your Lines





KAYA COMPANIES

www.kayacompanies.com

Kaya Companies;

A leader in its field today, Kaya Group began business in the 1980's as Kaya Construction. Kaya Group is now preparing to celebrate its 40th year of operation. Kaya Group concentrates its knowledge and experience in four main areas of activity; the production of technical ropes, industrial work safety and work at height, health and safety at work training and consulting services. Since being fully aware of the dimension of social responsibility attached to the sector, the company obtains national and international certificates for all products that are developed and manufactured.

By providing education and consultation services concerning the correct use of its products, the Kaya Group has gained the knowledge, experience and level of competence that have given the company the confidence and resources to be able to make new advances from a sound base. With its 40- year experience, the Kaya Group is the largest organization in the sector. In 2010, with new products, services and investments, the company is firmly on the path towards becoming an important brand in the international market.

Our Vision;

To make Kaya the undisputed world's strongest, most prestigious and trusted brand in its sector.

Mission Statement;

Our mission is to conduct research and development based on accurate analysis of needs in the sector and thereby develop new products; to employ modern machinery and a competent workforce in the manufacture of world-class, high quality goods; to provide training and consulting services to create knowledgeable workers and managers and help establish a culture of work safety in Turkey; and to provide complete solutions Via our integrated services.

Company Philosophy;

Based on the value we place on human life, our goal is to design products that will safeguard human life on the job, to manufacture such products and to raise awareness about work safety by training workers and managers and providing consultation services in this regard.

KAYA ROPES

KAYA TRAINING

KAYA SAFETY

KAYA CONSTRUCTION

KAYA LIFTING

KAYA DEFENCE

KAYA ADVENTURE

KAYA SPORT

KAYA CONSULTING

KAYA RESCUE

KAYA ARCHITECTURE

KAYA NATURAL

DYNE K®

APPLICATIONS

General Working Line
Wire Rope Replacement
Purse Seine Line
Trawl/Bridle Line
Lifting Sling (Static)
Bridle Line (Fish Farming)
Other Fishing Line

BENEFITS / FEATURES

Superior Abrasion Resistance
Excellent Breaking Load (SK99)
Buoyant
Durable
Very Low Stretch
Lightweight
Easy to Splice
Does not Kink

SPECIFICATIONS

Material	: Coated Dyneema® SK 78/99
Specific Gravity	: 0,97 kg/dm³
Construction	: 12 Strand Braided
UV Resistance	: Excellent
Chemical Resistance	: Excellent
Melting Point	: 147°C
Critical Temperature	: 65°C
Working Stretch	: <1%
Fiber Water Absorption	: None
Wet Abrasion	: Excellent
Dry Abrasion	: Excellent
Standard	: ISO 10325
Length	: 100-200 m Plastic/Wooden Spool or Coil

Other Colours & Larger Diameters Upon Request

DIA (mm)	Weight (kg/100m)	B.Load (kgf) SK78	B.Load (kgf) SK99	DIA (inch)	Weight (lbs/100ft)	B.Load (lbs) SK78	B.Load (lbs) SK99
2	0,25	425	502	5/64"	0,17	935	1.104
3	0,50	950	1.121	1/8"	0,34	2.090	2.466
4	0,95	1.650	1.947	5/32"	0,64	3.630	4.283
5	1,50	2.600	3.068	3/16"	1,01	5.720	6.750
6	2,30	3.750	4.425	1/4"	1,55	8.250	9.735
8	4,00	6.600	7.788	5/16"	2,69	14.520	17.134
10	6,10	10.400	12.272	3/8"	4,10	22.880	26.998
12	8,70	15.000	17.700	1/2"	5,85	33.000	38.940
14	11,70	20.400	24.072	9/16"	7,86	44.880	52.958
16	15,10	26.520	31.294	5/8"	10,15	58.344	68.847
18	19,00	31.620	37.312	3/4"	12,77	69.564	82.086
20	23,20	38.760	45.737	13/16"	15,59	85.272	100.621
22	28,10	45.900	54.162	7/8"	18,88	100.980	119.156
24	33,10	53.000	62.540	1"	22,24	116.600	137.588
26	38,40	61.200	72.200	1-1/16"	25,80	134.640	158.840
28	44,50	69.360	81.800	1-1/8"	29,90	152.592	179.960
30	50,60	78.540	92.600	1-1/4"	34,00	172.788	203.720
32	57,50	88.740	104.700	1-5/16"	38,64	195.228	230.340
34	64,80	97.920	115.500	1 3/8"	43,55	215.424	254.100
36	72,00	106.080	125.150	1-1/2"	48,38	233.376	275.330
38	79,80	118.320	139.600	1 9/16"	53,63	260.304	307.120
40	88,10	128.520	151.650	1-5/8"	59,20	282.744	333.630

*Unspliced Break Load (All Tests are in Accordance with ISO 2307)



APPLICATIONS

General Working Line
Wire Rope Replacement
Purse Seine Line
Trawl/Bridle Line
Lifting Sling (Static)
Bridle Line (Fish Farming)
Other Fishing Line

BENEFITS / FEATURES

Superior Abrasion Resistance
Excellent Breaking Load
Buoyant
Durable
Very Low Stretch
Lightweight
Easy to Splice
Does not Kink


SPECIFICATIONS

Material	: Coated UHMWPE Fiber
Specific Gravity	: 0,97 kg/dm ³
Construction	: 12 Strand Braided
UV Resistance	: Excellent
Chemical Resistance	: Excellent
Melting Point	: 147°C
Critical Temperature	: 65°C
Working Stretch	: <1,5%
Fiber Water Absorption	: None
Wet Abrasion	: Excellent
Dry Abrasion	: Excellent
Standard	: -
Length	: Upon Request

Other Colours & Larger Diameters Upon Request

DIA (mm)	Weight (kg/100m)	Min. B.Load (kgf) Unspliced	Min. B.Load (kgf) Spliced	DIA (inch)	Weight (lbs/100ft)	Min. B.Load (lbs) Unspliced	Min. B.Load (lbs) Spliced
2	0,25	404	364	5/64"	0,17	888	800
3	0,50	903	813	1/8"	0,34	1.986	1.789
4	0,95	1.568	1.412	5/32"	0,64	3.449	3.107
5	1,50	2.470	2.225	3/16"	1,01	5.434	4.895
6	2,30	3.563	3.192	1/4"	1,55	7.838	7.022
8	4,00	6.270	5.681	5/16"	2,69	13.794	12.498
10	6,10	9.880	8.911	3/8"	4,10	21.736	19.604
12	8,70	14.250	12.787	1/2"	5,85	31.350	28.131
14	11,70	19.380	17.442	9/16"	7,86	42.636	38.372
16	15,10	25.194	22.515	5/8"	10,15	55.427	49.533
18	19,00	30.039	27.075	3/4"	12,77	66.086	59.565
20	23,20	36.822	32.300	13/16"	15,59	81.008	71.060
22	28,10	43.605	38.760	7/8"	18,88	95.931	85.272
24	33,10	50.350	45.543	1"	22,24	110.770	100.195
26	38,40	58.140	52.326	1-1/16"	25,80	127.908	115.117
28	44,50	65.892	59.109	1-1/8"	29,90	144.962	130.040
30	50,60	74.613	66.861	1-1/4"	34,00	164.149	147.094
32	57,50	84.303	75.582	1-5/16"	38,64	185.467	166.280
34	64,80	93.024	83.334	1 3/8"	43,55	204.653	183.335
36	72,00	100.776	91.086	1-1/2"	48,38	221.707	200.389
38	79,80	112.404	100.776	1 9/16"	53,63	247.289	221.707
40	88,10	122.094	109.497	1-5/8"	59,20	268.607	240.893

*Unspliced Break Load (All Tests are in Accordance with ISO 2307)

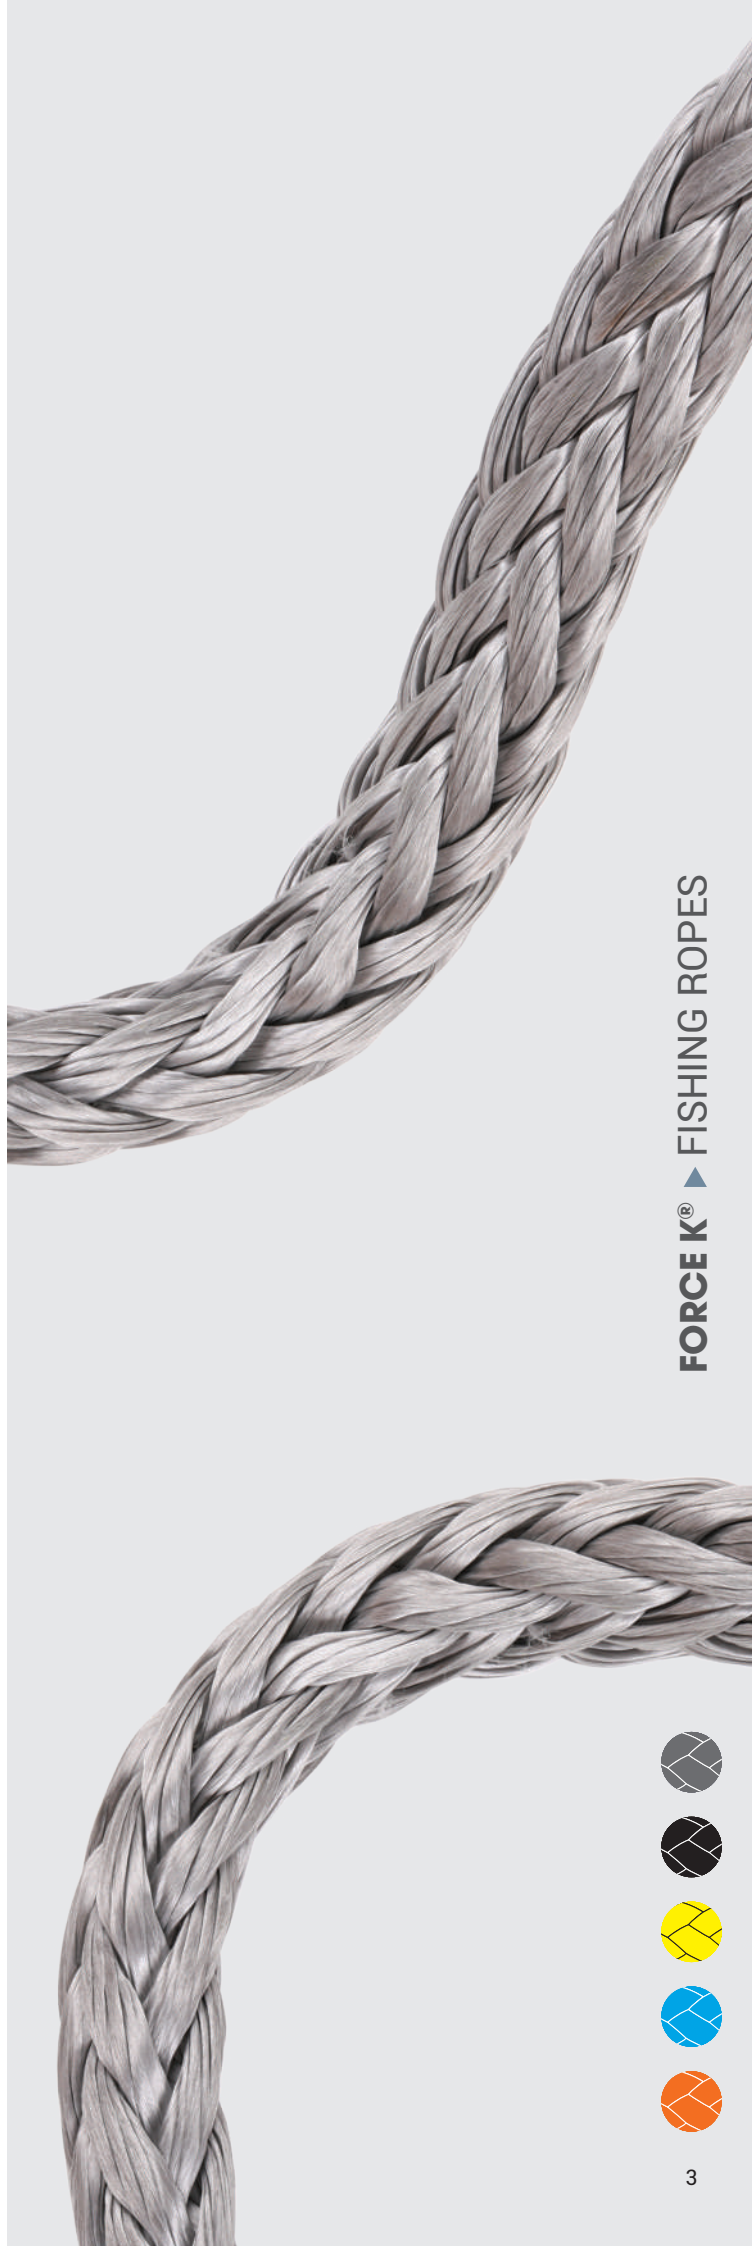

FORCE K® ▲ FISHING ROPES



DYNE STRONG® D-TIGHT

APPLICATIONS

General Working Line
Wire Rope Replacement
Trawl/Bridle Line
Other Fishing Line

BENEFITS / FEATURES

Superior Abrasion Resistance
Excellent Breaking Load
Durable
Very Low Stretch
Lightweight
Does not Kink



SPECIFICATIONS

Material	:	Cover Coated Dyneema® Core: Coated Dyneema® SK 78
Specific Gravity	:	0,97 kg/dm ³
Construction	:	Cover: 24-32 Plaited Core: 12 Plaited
UV Resistance	:	Excellent
Chemical Resistance	:	Excellent
Melting Point	:	147°C
Critical Temperature	:	65°C
Working Stretch	:	<1%
Fiber Water Absorption	:	None
Wet Abrasion	:	Excellent
Dry Abrasion	:	Excellent
Standard	:	ISO 10325
Length	:	Upon Request

Other Colours & Larger Diameters Upon Request

DIA (mm)	Weight (kg/100m)	Min. B.Load (kgf) Unspliced	Min. B.Load (kgf) Spliced	DIA (inch)	Weight (lbs/100ft)	Min. B.Load (lbs) Unspliced	Min. B.Load (lbs) Spliced
20	23,35	27.640	24.870	13/16"	15,69	60.808	54.714
22	28,76	34.780	31.300	7/8"	19,33	76.516	68.860
24	33,39	41.000	36.900	1"	22,44	90.200	81.180
26	40,05	48.000	43.200	1-1/16"	26,91	105.600	95.040
28	46,71	56.000	50.400	1-1/8"	31,39	123.200	110.880
30	53,36	65.000	58.500	1-1/8"	35,86	143.000	128.700
32	60,02	75.000	67.500	1-5/16"	40,34	165.000	148.500
34	66,68	84.000	75.600	1-3/8"	44,81	184.800	166.320
36	73,34	93.000	83.700	1-1/2"	49,28	204.600	184.140
38	82,25	103.000	92.700	1-9/16"	55,27	226.600	203.940
40	91,16	116.280	104.650	1-5/8"	61,26	255.816	230.230
42	97,82	128.000	115.200	1-11/16"	65,73	281.600	253.440
44	111,14	140.760	126.680	1-3/4"	74,68	309.672	278.696
48	131,11	164.220	147.790	2"	88,11	361.284	325.138
50	142,18	178.170	160.360	2-1/16"	95,55	391.974	352.792
52	153,25	195.840	176.250	2-1/8"	102,98	430.848	387.750
56	177,73	223.380	201.040	2-1/4"	119,43	491.436	442.288
60	204,36	257.040	231.330	2-1/2"	137,33	565.488	508.926

Spliced Break Load (All tests are in Accordance with ISO 2307)



FORCE STRONG® D-TIGHT

APPLICATIONS

General Working Line
Wire Rope Replacement
Trawl/Bridle Line
Other Fishing Line

BENEFITS / FEATURES

Superior Abrasion Resistance
Excellent Breaking Load
Durable
Very Low Stretch
Lightweight
Does not Kink



SPECIFICATIONS

Material	:	Cover: Coated UHMWPE Fiber Core: Coated UHMWPE Fiber
Specific Gravity	:	0,97 kg/dm3
Construction	:	Cover: 24-32 Plaited Core: 12 Plaited
UV Resistance	:	Excellent
Chemical Resistance	:	Excellent
Melting Point	:	147°C
Critical Temperature	:	65°C
Working Stretch	:	<1%
Fiber Water Absorption	:	None
Wet Abrasion	:	Excellent
Dry Abrasion	:	Excellent
Standard	:	-
Length	:	Upon Request

Other Colours & Larger Diameters Upon Request

DIA (mm)	Weight (kg/ 100m)	Min. B.Load (kgf) Unspliced	Min. B.Load (kgf) Spliced	DIA (inch)	Weight (lbs/ 100ft)	Min. B.Load (lbs) Unspliced	Min. B.Load (lbs) Spliced
20	23,35	26.258	23.627	13/16"	15,69	57.768	51.978
22	28,76	33.041	29.735	7/8"	19,33	72.690	65.417
24	33,39	38.950	35.055	1"	22,44	85.690	77.121
26	40,05	45.600	41.040	1-1/16"	26,91	100.320	90.288
28	46,71	53.200	47.880	1-1/8"	31,39	117.040	105.336
30	53,36	61.750	55.575	1-1/8"	35,86	135.850	122.265
32	60,02	71.250	64.125	1-5/16"	40,34	156.750	141.075
34	66,68	79.800	71.820	1-3/8"	44,81	175.560	158.004
36	73,34	88.350	79.515	1-1/2"	49,28	194.370	174.933
38	82,25	97.850	88.065	1-9/16"	55,27	215.270	193.743
40	91,16	110.466	99.418	1-5/8"	61,26	243.025	218.719
42	97,82	121.600	109.440	1-11/16"	65,73	267.520	240.768
44	111,14	133.722	120.346	1-3/4"	74,68	294.188	264.761
48	131,11	156.009	140.401	2"	88,11	343.220	308.881
50	142,18	169.262	152.342	2-1/16"	95,55	372.375	335.152
52	153,25	186.048	167.438	2-1/8"	102,98	409.306	368.363
56	177,73	212.211	190.988	2-1/4"	119,43	466.864	420.174
60	204,36	244.188	219.764	2-1/2"	137,33	537.214	483.480

Spliced Break Load (All tests are in Accordance with ISO 2307)



FORCE STRONG® D-TIGHT ▲ FISHING ROPES



LUPP® SQUARE FILM

APPLICATIONS

General Working Line
Purse Seine Line
Trawl/Bridle Line
Bridle Line (Fish Farming)
Other Fishing Line

BENEFITS / FEATURES

Excellent Grip
Moderate Elongation
Buoyant
Economically Priced
Does not Kink
Easy to Splice
%25-30 More Strength than Normal
PP Ropes



SPECIFICATIONS

Material	: 100% HT Polyolefin Film Fiber
Type	: L
Specific Gravity	: 0,94 kg/dm ³
Construction	: 8 Strand Plaited (4x2)
UV Resistance	: Sufficient
Chemical Resistance	: Very Good
Melting Point	: 165°C
Critical Temperature	: 80°C
Elongation At Break	: Approx.23%
Fiber Water Absorption	: None
Wet Abrasion	: Sufficient
Dry Abrasion	: Sufficient
Standard	: ISO 10572
Length	: 200-220 m Coil

Other Colours on Request

DIA (mm)	Weight (kg/220m)	Min. B.load (Kgf) Unspliced	DIA (inch)	Weight (lbs/220ft)	Min. B.Load (lbs) Unspliced
40	158,00	26.300	1-5/8"	106,18	57.860
48	229,00	37.500	2"	153,89	82.500
56	312,00	53.100	2-1/4"	209,66	116.820
64	407,00	68.700	2-5/8"	273,50	151.140
72	515,00	86.000	3"	346,08	189.200
80	638,00	105.800	3-1/4"	428,73	232.760
88	772,00	125.000	3-5/8"	518,78	275.000
96	917,00	150.200	4"	616,22	330.440

*Unspliced Break Load (All tests are in Accordance with ISO 2307)



LUPP® TWIST FILM

APPLICATIONS

General Working Line
Purse Seine Line
Crab Rope
Longline
Buoy Line (Fish Farming)
Other Fishing Line

BENEFITS / FEATURES

Does not Harden
Soft Hand
Economically Priced
Buoyant
Easy to Splice



SPECIFICATIONS

Material	: 100% HT Polypropylene Film Fiber
Type	: A
Specific Gravity	: 0,91 kg/dm ³
Construction	: 3 Strand Plaited
UV Resistance	: Sufficient
Chemical Resistance	: Very Good
Melting Point	: 165°C
Critical Temperature	: 80°C
Elongation At Break	: Approx. %23
Fiber Water Absorption	: None
Wet Abrasion	: Sufficient
Dry Abrasion	: Sufficient
Standard	: EN ISO 1346
Length	: 200-220 m Coil

Other Colours on Request

DIA (mm)	Weight (kg/100m)	Min. B.Load (kgf)	DIA (inch)	Weight (lbs/100ft)	Min. B.Load (lbs)
8	2,89	1.040	5/16"	1,94	2.288
10	4,52	1.530	3/8"	3,04	3.366
12	6,51	2.170	1/2"	4,37	4.774
14	8,86	2.490	9/16"	5,95	5.478
16	11,60	3.700	5/8"	7,80	8.140
18	14,60	4.720	3/4"	9,81	10.384
20	18,10	5.690	13/16"	12,16	12.518
24	26,00	7.920	1"	17,47	17.424
28	35,40	10.500	1-1/8"	23,79	23.100
32	46,30	13.200	1-5/16"	31,11	29.040
36	58,60	16.600	1-1/2"	39,38	36.520

*Unspliced Break Load (All tests are in Accordance with ISO 2307)



LUPP® TWIST FILM ▲ FISHING ROPES



LUPES® TWIST TRAWL

APPLICATIONS

Trawl/Bridle Line

BENEFITS / FEATURES

Quick Sink Rate
Durable



SPECIFICATIONS

Material	:	100% HT Polyester Fiber + 6X7 Galvanized Wire Rope
Type	:	A
Specific Gravity	:	-
Construction	:	3+1 Strand Plaited
UV Resistance	:	Excellent
Chemical Resistance	:	Good
Melting Point	:	256°C
Critical Temperature	:	170°C
Elongation At Break	:	Approx. %4-5
Fiber Water Absorption	:	Approx. %1-2
Wet Abrasion	:	Good
Dry Abrasion	:	Good
Standard	:	-
Length	:	Upon Request

Other Colours on Request

DIA (mm)	Weight (kg/100m)	Min. B.Load (kgf)	DIA (inch)	Weight (lbs/100ft)	Min. B.Load (lbs)
30	75,00	-	1-1/4"	50,40	-
32	100,00	-	1-5/16"	67,20	-

*Unspliced Break Load (All tests are in Accordance with ISO 2307)

LUPES® LEAD

APPLICATIONS

Trawl/Bridle Line
Gillnet & Cork Line
Other Fishing Line

BENEFITS / FEATURES

Quick Sink Rate
Durable




SPECIFICATIONS

Material	: Cover : HT Polyester Fiber Core : Lead Chain
Specific Gravity	: 1,35-1,45 kg/dm ³
Construction	: Cover : 16-24-32 Plaited Core : Parallel Lead Chain
UV Resistance	: Excellent
Chemical Resistance	: Good
Melting Point	: 256°C
Critical Temperature	: 170°C
Elongation At Break	: Approx. %16
Fiber Water Absorption	: Approx. %1-2
Wet Abrasion	: Good
Dry Abrasion	: Good
Standard	: -
Length	: Upon Request

Other Colours & Larger Diameters Upon Request

DIA (mm)	Weight (kg/100m)	B.Load (kgf)	DIA (inch)	Weight (lbs/100ft)	B.Load (lbs)
12	50,00	-	1/2"	33,60	-
16	100,00	-	5/8"	67,20	-
22	200,00	-	7/8"	134,40	-
30	300,00	-	1-1/4"	201,60	-

*Unspliced Break Load (All tests are in Accordance with ISO 2307)

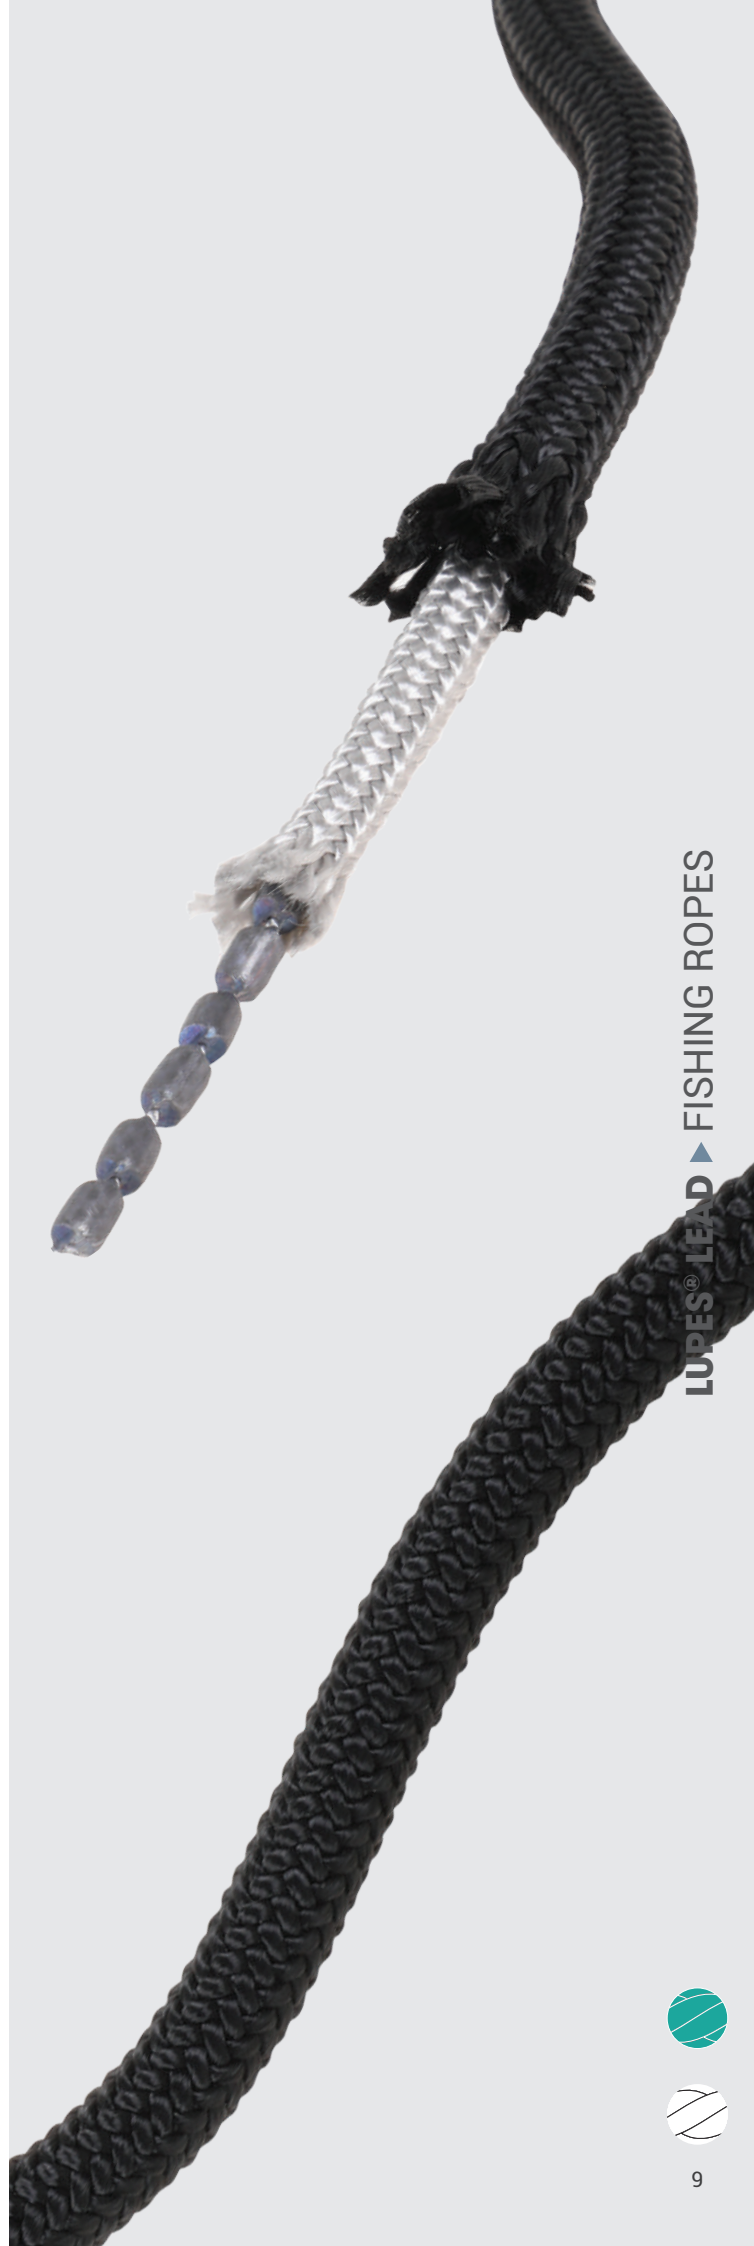

LUPES® LEAD ▲ FISHING ROPES





CLASSIC
LOOK



LUPES® ROUND

APPLICATIONS

General Working Line
Purse Seine Line
Trawl/Bridle Line
Other Fishing Line

BENEFITS / FEATURES

Does not Harden
Does not Kink
Soft Hand
Durable
High Breaking Load
Easy to Splice
Excellent Abrasion Resistance

SPECIFICATIONS

Material	: 100% HT Polyester Fiber
Type	: T
Specific Gravity	: 1,38 kg/dm³
Construction	: 12 Strand Plaited
UV Resistance	: Excellent
Chemical Resistance	: Good
Melting Point	: 256°C
Critical Temperature	: 170°C
Elongation At Break	: Approx.%15-20
Fiber Water Absorption	: Approx. %1-2
Wet Abrasion	: Good
Dry Abrasion	: Good
Standard	: EN ISO 1141
Length	: 100-200 m Wooden Spool or Coil

Other Colours on Request

DIA (mm)	Weight (kg/100m)	Min. B.Load (kgf)	DIA (inch)	Weight (lbs/100ft)	Min. B.Load (lbs)
18	27,15	7.640	3/4"	18,24	16.808
20	30,40	8.250	13/16"	20,43	18.150
22	36,70	10.000	7/8"	24,66	22.000
24	43,70	11.500	1"	29,37	25.300
26	51,20	13.500	1-1/16"	34,41	29.700
28	59,50	15.500	1-1/8"	39,98	34.100
30	68,30	17.750	1-1/4"	45,90	39.050
32	77,70	20.000	1-5/16"	52,21	44.000
34	88,00	22.500	1 3/8"	59,14	49.500
36	98,40	25.000	1-1/2"	66,12	55.000
38	109,70	29.000	1-9/16"	73,72	63.800
40	121,00	33.000	1-5/8"	81,31	72.600
42	134,00	36.250	1-11/16"	90,05	79.750
44	147,00	39.500	1-3/4"	98,78	86.900
46	161,00	42.750	1-13/16"	108,19	94.050
48	175,00	46.000	2"	117,60	101.200
52	205,00	54.000	2-1/8"	137,76	118.800
56	238,00	62.000	2-1/4"	159,94	136.400
60	273,00	71.000	2-1/2"	183,46	156.200
64	311,00	80.000	2-5/8"	208,99	176.000
72	393,00	100.000	3"	264,10	220.000
80	486,00	123.000	3-1/4"	326,59	270.600
88	588,00	148.000	3-5/8"	395,13	325.600
96	699,00	175.000	4"	469,73	385.000

*Unspliced Break Load (All tests are in Accordance with ISO 2307)

LUPA® ROUND

APPLICATIONS

General Working Line
Purse Seine Line
Trawl/Bridle Line
Anchor Line (Fish Farming)
Grid Line (Fish Farming)
Other Fishing Line

BENEFITS / FEATURES

Does not Harden
Does not Kink
Soft Hand
Durable
High Breaking Load
Excellent Shock Absorption
Easy to Splice

SPECIFICATIONS

Material	: 100% HT Polyamide Fiber
Type	: T
Specific Gravity	: 1,14 kg/dm ³
Construction	: 12 Strand Plaited
UV Resistance	: Very Good
Chemical Resistance	: Good
Melting Point	: 218°C
Critical Temperature	: 130°C
Elongation At Break	: Approx.%30-35
Fiber Water Absorption	: Approx. %3-4
Wet Abrasion	: Sufficient
Dry Abrasion	: Good
Standard	: EN ISO 1140
Length	: 100-200 m Wooden Spool or Coil

Other Colours on Request

DIA (mm)	Weight (kg/100m)	Min. B.Load (kgf)	DIA (inch)	Weight (lbs/100ft)	Min. B.Load (lbs)
18	23,00	8.000	3/4"	15,46	17.600
20	25,00	8.670	13/16"	16,80	19.074
22	30,50	10.300	7/8"	20,50	22.660
24	36,00	12.030	1"	24,19	26.466
26	42,50	14.500	1-1/16"	28,56	31.900
28	49,00	17.000	1-1/8"	32,93	37.400
30	56,00	19.000	1-1/4"	37,63	41.800
32	64,00	21.125	1-5/16"	43,01	46.475
34	72,50	24.310	1 3/8"	48,72	53.482
36	81,00	27.500	1-1/2"	54,43	60.500
38	90,50	30.750	1-9/16"	60,82	67.650
40	100,00	34.000	1-5/8"	67,20	74.800
42	110,50	37.500	1-11/16"	74,26	82.500
44	121,00	41.000	1-3/4"	81,31	90.200
46	132,50	44.500	1-13/16"	89,04	97.900
48	144,20	48.000	2"	96,90	105.600
52	170,00	58.000	2-1/8"	114,24	127.600
56	197,00	68.000	2-1/4"	132,38	149.600
60	226,00	76.250	2-1/2"	151,87	167.750
64	257,00	84.500	2-5/8"	172,70	185.900
72	325,00	110.000	3"	218,40	242.000
80	401,00	129.000	3-1/4"	269,47	283.800
88	486,00	152.000	3-5/8"	326,59	334.400
96	578,00	183.000	4"	388,41	402.600

*Unspliced Break Load (All tests are in Accordance with ISO 2307)

LUPA® ROUND ▲ FISHING ROPES



LUPES® SQUARE

APPLICATIONS

General Working Line
Purse Seine Line
Trawl/Bridle Line
Other Fishing Line

BENEFITS / FEATURES

Does not Harden
Does not Kink
Soft Hand
Durable
High Breaking Load
Easy to Splice
Excellent Abrasion Resistance



SPECIFICATIONS

Material	: 100% HT Polyester Fiber
Type	: L
Specific Gravity	: 1,38 kg/dm³
Construction	: 8 Strand Plaited (4x2)
UV Resistance	: Excellent
Chemical Resistance	: Good
Melting Point	: 265°C
Critical Temperature	: 170°C
Elongation At Break	: Approx. %15-20
Fiber Water Absorption	: Approx. %1-2
Wet Abrasion	: Good
Dry Abrasion	: Good
Standard	: EN ISO 1141
Length	: 100-200 m Wooden Spool or Coil

Other Colours on Request

DIA (mm)	Weight (kg/100m)	Min. B.Load (kgf)	DIA (inch)	Weight (lbs/100ft)	Min. B.Load (lbs)
12	10,90	2.875	1/2"	7,32	6.325
14	14,90	3.875	9/16"	10,01	8.525
16	19,40	5.000	5/8"	13,04	11.000
18	24,60	6.250	3/4"	16,53	13.750
20	30,40	8.250	13/16"	20,43	18.150
22	36,70	10.000	7/8"	24,66	22.000
24	43,70	11.500	1"	29,37	25.300
26	51,20	13.500	1-1/16"	34,41	29.700
28	59,50	15.500	1-1/8"	39,98	34.100
30	68,30	17.500	1-1/4"	45,90	38.500
32	77,70	20.000	1-5/16"	52,21	44.000
34	88,00	22.500	1 3/8"	59,14	49.500
36	98,40	25.000	1-1/2"	66,12	55.000
38	109,70	29.000	1 9/16"	73,72	63.800
40	121,00	33.000	1-5/8"	81,31	72.600

*Unspliced Break Load (All tests are in Accordance with ISO 2307)



CLASSIC
LOOK



LUPA[®] SQUARE

APPLICATIONS

General Working Line
Purse Seine Line
Trawl/Bridle Line
Anchor Line (Fish Farming)
Grid Line (Fish Farming)
Other Fishing Line

BENEFITS / FEATURES

Does not Harden
Does not Kink
Soft Hand
Durable
High Breaking Load
Excellent Shock Absorption
Easy to Splice



SPECIFICATIONS

Material	: 100% HT Polyamide Fiber
Type	: L
Specific Gravity	: 1,14 kg/dm ³
Construction	: 8 Strand Plaited (4x2)
UV Resistance	: Very Good
Chemical Resistance	: Good
Melting Point	: 218°C
Critical Temperature	: 130°C
Elongation At Break	: Approx. %30-35
Fiber Water Absorption	: Approx. %3-4
Wet Abrasion	: Sufficient
Dry Abrasion	: Good
Standard	: EN ISO 1140
Length	: 100-200 m Plastic/Wooden Spool or Coil

Other Colours on Request

DIA (mm)	Weight (kg/100m)	Min. B.Load (kgf)	DIA (inch)	Weight (lbs/100ft)	Min. B.Load (lbs)
12	9,00	3.060	1/2"	6,05	6.732
14	12,30	4.250	9/16"	8,27	9.350
16	16,00	5.400	5/8"	10,75	11.880
18	20,50	6.875	3/4"	13,78	15.125
20	25,00	8.500	13/16"	16,80	18.700
22	30,50	10.250	7/8"	20,50	22.550
24	36,00	12.000	1"	24,19	26.400
26	42,50	14.500	1-1/16"	28,56	31.900
28	49,00	17.000	1-1/8"	32,93	37.400
30	56,00	19.000	1-1/4"	37,63	41.800
32	64,00	21.125	1-5/16"	43,01	46.475
34	72,50	24.310	1-3/8"	48,72	53.482
36	81,00	27.500	1-1/2"	54,43	60.500
38	90,50	30.750	1-9/16"	60,82	67.650
40	100,00	34.000	1-5/8"	67,20	74.800

*Unspliced Break Load (All tests are in Accordance with ISO 2307)

LUPA[®] SQUARE ▲ FISHING ROPES



CLASSIC
LOOK

LUPP® SQUARE

APPLICATIONS

Purse Seine Line
Buoy Line (Fish Farming)
Other Fishing Line

BENEFITS / FEATURES

Does not Harden
Does not Kink
Soft Hand
Economically Priced
Buoyant
Easy to Splice

SPECIFICATIONS

Material	: 100% HT Polypropylene Fiber
Type	: L
Specific Gravity	: 0,91 kg/dm ³
Construction	: 8 Strand Plaited (4x2)
UV Resistance	: Sufficient
Chemical Resistance	: Very Good
Melting Point	: 165°C
Critical Temperature	: 80°C
Elongation At Break	: Approx. %23
Fiber Water Absorption	: None
Wet Abrasion	: Sufficient
Dry Abrasion	: Sufficient
Standard	: EN ISO 1346
Length	: 100-200 m Plastic/Wooden Spool or Coil

Other Colours on Request

DIA (mm)	Weight (kg/100m)	Min. B.Load (kgf)	DIA (inch)	Weight (lbs/100ft)	Min. B.Load (lbs)
12	6,51	2.280	1/2"	4,37	5.016
14	8,86	3.225	9/16"	5,95	7.095
16	11,60	4.310	5/8"	7,80	9.482
18	14,60	5.350	3/4"	9,81	11.770
20	18,10	6.500	13/16"	12,16	14.300
22	21,90	7.740	7/8"	14,72	17.028
24	26,00	9.060	1"	17,47	19.932
26	30,80	10.500	1-1/16"	20,70	23.100
28	35,40	12.900	1-1/8"	23,79	28.380
30	40,70	14.600	1-1/4"	27,35	32.120
32	46,30	16.400	1-5/16"	31,11	36.080
34	52,40	18.250	1-3/8"	35,21	40.150
36	58,60	20.100	1-1/2"	39,38	44.220
38	65,40	22.200	1-9/16"	43,95	48.840
40	72,30	24.300	1-5/8"	48,59	53.460

*Unspliced Break Load (All tests are in Accordance with ISO 2307)



LUPES® TWIST

APPLICATIONS

General Working Line
Trawl/Bridle Line
Longline
Other Fishing Line

BENEFITS / FEATURES

Does not Harden
Soft Hand
Durable
High Breaking Load
Easy to Splice
Excellent Abrasion Resistance

SPECIFICATIONS

Material	: 100% HT Polyester Fiber
Type	: A
Specific Gravity	: 1,38 kg/dm ³
Construction	: 3 Strand Plaited
UV Resistance	: Excellent
Chemical Resistance	: Good
Melting Point	: 265°C
Critical Temperature	: 170°C
Elongation At Break	: Approx. %15-20
Fiber Water Absorption	: Approx. %1-2
Wet Abrasion	: Good
Dry Abrasion	: Good
Standard	: EN ISO 1141
Length	: 200 m Plastic/Wooden Spool or Coil

Other Colours on Request

DIA (mm)	Weight (kg/100m)	Min. B.Load (kgf)	DIA (inch)	Weight (lbs/100ft)	Min. B.Load (lbs)
4	1,21	325	5/32"	0,81	715
5	1,90	515	3/16"	1,28	1.133
6	2,73	720	1/4"	1,83	1.584
8	4,85	1.300	5/16"	3,26	2.860
10	7,58	2.060	3/8"	5,09	4.532
12	10,90	2.875	1/2"	7,32	6.325
14	14,90	3.875	9/16"	10,01	8.525
16	19,40	5.000	5/8"	13,04	11.000
18	24,60	6.250	3/4"	16,53	13.750
20	30,30	8.250	13/16"	20,36	18.150
22	36,70	10.000	7/8"	24,66	22.000
24	43,70	11.500	1"	29,37	25.300
26	51,20	13.500	1-1/16"	34,41	29.700
28	59,40	15.500	1-1/8"	39,92	34.100
30	68,20	17.750	1-1/4"	45,83	39.050
32	77,60	20.000	1-5/16"	52,15	44.000
36	98,40	25.000	1-1/2"	66,12	55.000
40	121,00	33.000	1-5/8"	81,31	72.600
48	175,00	46.000	2"	117,60	101.200
56	238,00	62.000	2-1/4"	159,94	136.400
64	311,00	80.000	2-5/8"	208,99	176.000

*Unspliced Break Load (All tests are in Accordance with ISO 2307)

LUPA® TWIST

APPLICATIONS

General Working Line
Trawl/Bridle Line
Longline
Anchor Line (Fish Farming)
Grid Line (Fish Farming)
Other Fishing Line

BENEFITS / FEATURES

Does not Harden
Soft Hand
Durable
High Breaking Load
Excellent Shock Absorption
Easy to Splice

SPECIFICATIONS

Material	: 100% HT Polyamide Fiber
Type	: A
Specific Gravity	: 1,14 kg/dm ³
Construction	: 3 Strand Plaited
UV Resistance	: Very Good
Chemical Resistance	: Good
Melting Point	: 218°C
Critical Temperature	: 130°C
Elongation At Break	: Approx. %30-35
Fiber Water Absorption	: Approx. %3-4
Wet Abrasion	: Sufficient
Dry Abrasion	: Good
Standard	: EN ISO 1140
Length	: 200 m Plastic/Wooden Spool or Coil

Other Colours on Request


DIA (mm)	Weight (kg/100m)	Min. B.Load (kgf)	DIA (inch)	Weight (lbs/100ft)	Min. B.Load (lbs)
4	0,98	380	5/32"	0,66	836
5	1,54	570	3/16"	1,03	1.254
6	2,22	810	1/4"	1,49	1.782
8	3,95	1.420	5/16"	2,65	3.124
10	6,17	2.160	3/8"	4,15	4.752
12	8,88	3.060	1/2"	5,97	6.732
14	12,10	4.250	9/16"	8,13	9.350
16	15,80	5.280	5/8"	10,62	11.616
18	20,00	6.875	3/4"	13,44	15.125
20	24,70	8.500	13/16"	16,60	18.700
22	29,90	10.250	7/8"	20,09	22.550
24	35,50	12.000	1"	23,86	26.400
26	41,70	14.500	1-1/16"	28,02	31.900
28	48,40	17.000	1-1/8"	32,52	37.400
30	55,50	19.000	1-1/4"	37,30	41.800
32	63,20	21.125	1-5/16"	42,47	46.475
36	80,00	27.500	1-1/2"	53,76	60.500
40	98,70	34.000	1-5/8"	66,33	74.800
48	142,00	48.000	2"	95,42	105.600
56	193,00	68.000	2-1/4"	129,70	149.600
64	253,00	84.500	2-5/8"	170,02	185.900

*Unspliced Break Load (All tests are in Accordance with ISO 2307)



LUPA® TWIST ▲ FISHING ROPES





LUPES® SOLID

APPLICATIONS

Crab Rope
Gillnet & Cork Line
Longline
Other Fishing Line

BENEFITS / FEATURES

Easy Handling
Very Stable Round Cross-Section

SPECIFICATIONS

Material	:	100% HT Polyester Fiber
Specific Gravity	:	1,38 kg/dm ³
Construction	:	Solid Braid (12 Plaited)
UV Resistance	:	Excellent
Chemical Resistance	:	Good
Melting Point	:	256°C
Critical Temperature	:	170°C
Working Stretch	:	<6%
Fiber Water Absorption	:	Approx. %1-2
Wet Abrasion	:	Good
Dry Abrasion	:	Good
Length	:	100-200 m Plastic Spool

Other Colours & Larger Diameters Upon Request

DIA (mm)	Weight (kg/100m)	B.Load (kgf)	DIA (inch)	Weight (lbs/100ft)	B.Load (lbs)
3	0,75	130	1/8"	0,50	286
4	1,15	220	5/32"	0,77	484
5	1,50	330	3/16"	1,01	726
6	2,25	450	1/4"	1,51	990
8	3,75	780	5/16"	2,52	1.716

*Unspliced Break Load (All Tests are in Accordance with ISO 2307)

LUPP® CORD

APPLICATIONS

Longline
Other Fishing Line

BENEFITS / FEATURES

Outstanding Flexibility
Economically Priced
Low Stretch
Buoyant

SPECIFICATIONS

Material	:	Cover: HT Polypropylene Fiber Core: HT Polypropylene Fiber
Specific Gravity	:	0,91 kg/dm ³
Construction	:	Cover: 16 Plaited, Core: Parallel Braided
UV Resistance	:	Sufficient
Chemical Resistance	:	Very Good
Melting Point	:	165°C
Critical Temperature	:	80°C
Working Stretch	:	<6%
Fiber Water Absorption	:	None
Wet Abrasion	:	Sufficient
Length	:	100-200 m Plastic Spool

Other Colours & Larger Diameters Upon Request

DIA (mm)	Weight (kg/100m)	B.Load (kgf)	DIA (inch)	Weight (lbs/100ft)	B.Load (lbs)
4	0,70	250	5/32"	0,47	550
5	1,20	400	3/16"	0,81	880
6	1,60	550	1/4"	1,08	1.210

*Unspliced Break Load (All Tests are in Accordance with ISO 2307)

LUPES® CORD

APPLICATIONS

Crab Rope
Gillnet & Cork Line
Longline
Other Fishing Line

BENEFITS / FEATURES

Outstanding Flexibility
Great Value for Money
Low Stretch

SPECIFICATIONS

Material	:	Cover: HT Polyester Fiber Core: HT Polyester Fiber
Specific Gravity	:	1,38 kg/dm ³
Construction	:	Cover: 16-20 Plaited Core: Parallel Braided
UV Resistance	:	Excellent
Chemical Resistance	:	Good
Melting Point	:	256°C
Critical Temperature	:	170°C
Working Stretch	:	<5%
Fiber Water Absorption	:	Approx. %1-2
Wet Abrasion	:	Good
Length	:	100-200 m Plastic Spool

Other Colours & Larger Diameters Upon Request

DIA (mm)	Weight (kg/100m)	B.Load (kgf)	DIA (inch)	Weight (lbs/100ft)	B.Load (lbs)
3	0,85	180	1/8"	0,57	396
4	1,20	300	5/32"	0,81	660
5	1,95	460	3/16"	1,31	1.012
6	2,70	660	1/4"	1,81	1.452

*Unspliced Break Load (All Tests are in Accordance with ISO 2307)

LUPA® CORD

APPLICATIONS

Longline
Other Fishing Line

BENEFITS / FEATURES

Outstanding Flexibility
Great Value for Money
Excellent Shock Absorption


SPECIFICATIONS

Material	:	Cover: HT Polyamide Fiber Core: HT Polyamide Fiber
Specific Gravity	:	1,14 kg/dm ³
Construction	:	Cover: 16-20 Plaited Core: Parallel Braided
UV Resistance	:	Very Good
Chemical Resistance	:	Good
Melting Point	:	218°C
Critical Temperature	:	130°C
Working Stretch	:	<12%
Fiber Water Absorption	:	Approx. %3-4
Wet Abrasion	:	Sufficient
Length	:	100-200 m Plastic Spool

Other Colours & Larger Diameters Upon Request

DIA (mm)	Weight (kg/100m)	B.Load (kgf)	DIA (inch)	Weight (lbs/100ft)	B.Load (lbs)
3	0,70	200	1/8"	0,47	440
4	1,00	330	5/32"	0,67	726
5	1,60	500	3/16"	1,08	1.100
6	2,25	720	1/4"	1,51	1.584

*Unspliced Break Load (All Tests are in Accordance with ISO 2307)

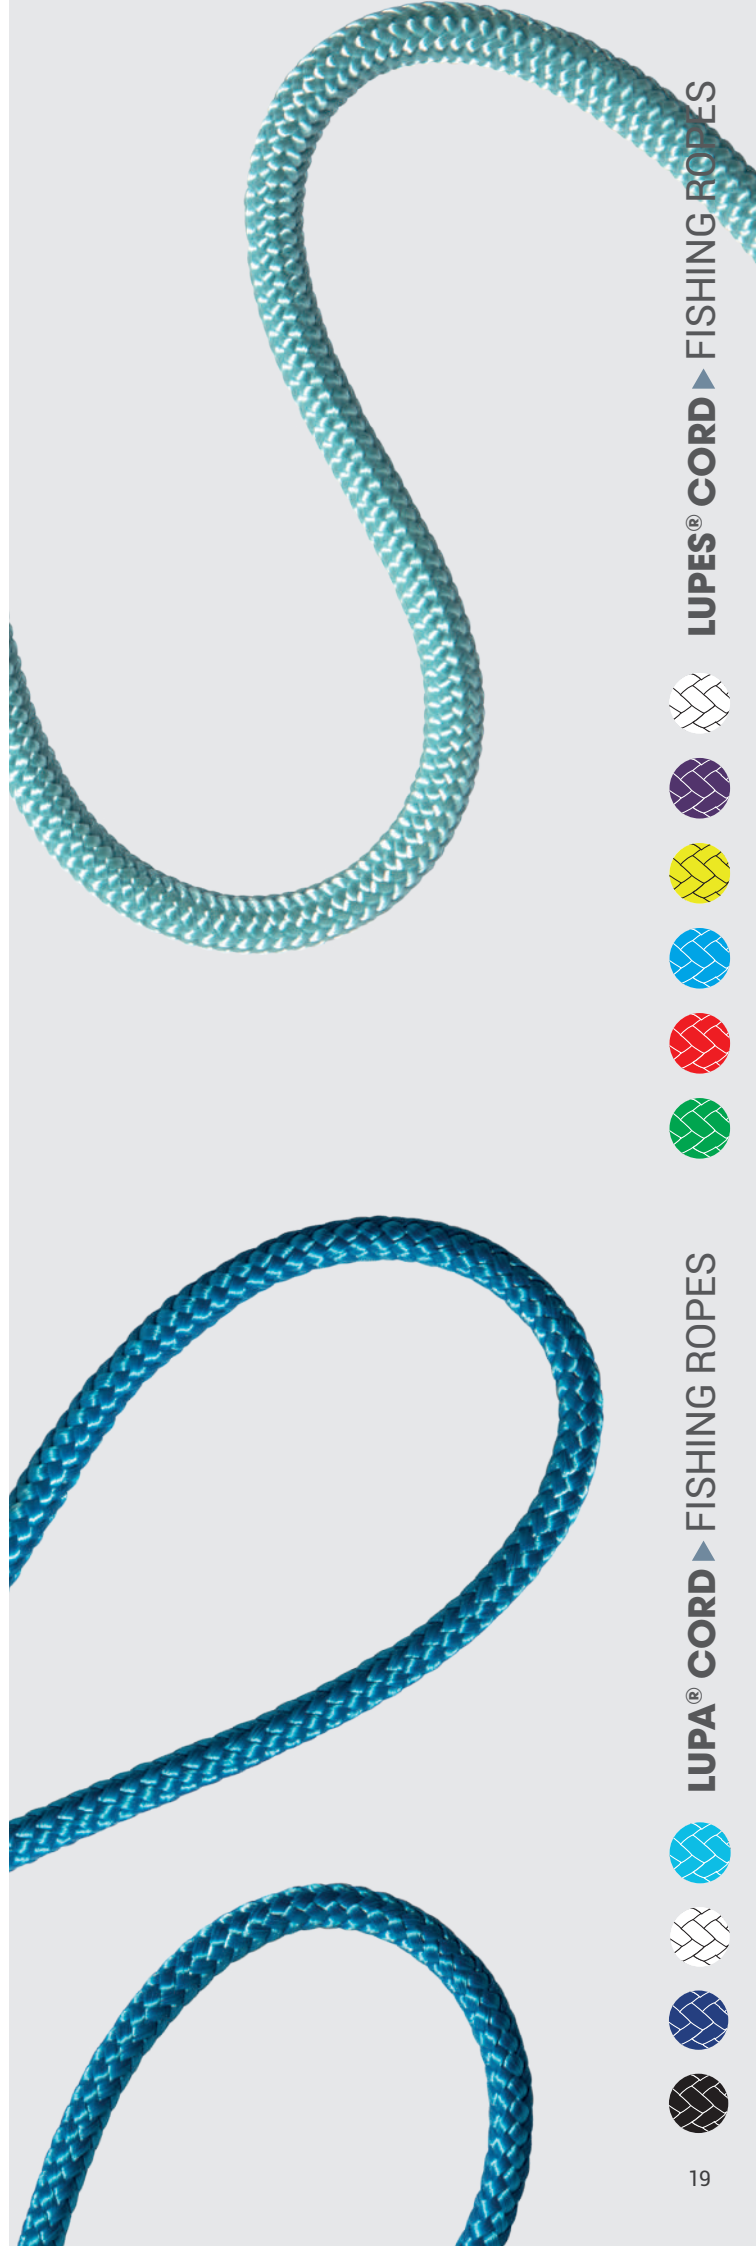

LUPES® CORD ▲ FISHING ROPES



LUPA® CORD ▲ FISHING ROPES





DYNE COVER



APPLICATIONS

Chafe Protection

BENEFITS / FEATURES

Superior Abrasion Resistance
Cut Resistant
Durable
Lightweight
Flexible
Buoyant

Dyne Cover is special cover made out of Dyneema®, designed and built to protect your splice eye from wear and abrasion for use in heavy duty applications like tug operations. Dyne Cover offers superior protection for ropes on vessels where every day mooring operation are in need.

SPECIFICATIONS

Material : 100% Coated Dyneema® SK78
Length : Standard Length is 365 cm

Other Colours on Request

Size	ROPE DIA (mm)	COVER SPLICES DIA (mm)	Standard Length (cm)	ROPE DIA (inch)	Thickness Polyester Guard (inch)	Standard Length (Feet)
A	24-30	14-16	365	1"-1-1/4"	9/16"-5/8"	12,00
B	32-44	18-24	365	1-5/16"-1-3/4"	3/4-1"	12,00
C	45-60	28-34	365	1-7/8"-2-1/2"	1-1/8"-1-3/8"	12,00
D	64-76	36-44	365	2-5/8"-3-1/8"	1-1/2"-1-3/4"	12,00
E	80-104	46-56	365	3-1/4"-4-1/4"	1-7/8"-2-3/8"	12,00

LUPES® COVER

APPLICATIONS

Chafe Protection

BENEFITS / FEATURES

Excellent Abrasion Resistance
Cut Resistant
Durable
Flexible

Our "tightly braided" Polyester cover is very strong and durable, which is designed and developed to protect your rope from abrasion that is usually caused by repetitive motion against unsympathetic contact surfaces. Even little bit of friction can damage unprotected lines. This particular product we have offers an economical solution against abrasion.

SPECIFICATIONS

Material : 100% HT Polyester Fiber
Length : Standard Length is 365 cm

Other Colours on Request

Size	ROPE DIA (mm)	COVER SPLICES DIA (mm)	Standard Length (cm)	ROPE DIA (inch)	COVER SPLICES DIA (inch)	Standard Length (Feet)
A	24-30	14-16	365	1"-1-1/4"	9/16"-5/8"	12,00
B	32-44	18-24	365	1-5/16"-1-3/4"	3/4-1"	12,00
C	45-60	28-34	365	1-7/8"-2-1/2"	1-1/8"-1-3/8"	12,00
D	64-76	36-44	365	2-5/8"-3-1/8"	1-1/2"-1-3/4"	12,00
E	80-104	46-56	365	3-1/4"-4-1/4"	1-7/8"-2-3/8"	12,00

POLYESTER GUARD

APPLICATIONS

Chafe Protection

BENEFITS / FEATURES

Good Abrasion Resistance
Easy to Install & Remove
High Flexibility
Mildew Resistant

Polyester woven sleeve is strong, resistant to UV light and chemicals, kind on the hands and stretches just moderately when loaded and ideal for protecting spliced eyes. This is the fiber to choose in any application where ultimate performance or minimum weight is not absolutely essential. It is available in different colors.

SPECIFICATIONS

Material : 100% HT Polyester Fabric + Velcro Strip
Length : Standard Length is 365 cm

Other Colours on Request

Size	ROPE DIA (mm)	Thickness Polyester Guard (mm)	Standard Length (cm)	ROPE DIA (inch)	Thickness Polyester Guard (inch)	Standard Length (Feet)
A	24-36	1,5	365	1"—1-1/2"	1/16"	12,00
B	40-52	1,5	365	1-5/8"—2-1/8"	1/16"	12,00
C	56-64	1,5	365	2-1/4"—2-5/8"	1/16"	12,00
D	68-80	1,5	365	2-3/4"—3-1/4"	1/16"	12,00

CORDURA® GUARD

APPLICATIONS

Chafe Protection

BENEFITS / FEATURES

Very Good Abrasion Resistance
Mildew Resistant
Easy to Install & Remove
High Flexibility

Cordura® chafe guard is a woven product that are known for their durability and resistance to abrasions, tears and scuffs. Cordura® is a high strength, cut resistant nylon fabric that is great for adding abrasion resistance to marine ropes used in tough conditions. This particular material is twice the abrasion resistance of standard nylon and three times the abrasion resistance of polyester. It is available in removable velcro strip.

SPECIFICATIONS

Material : 100% HT Cordura® Fabric + Velcro Strip
Length : Standard Length is 365 cm

Other Colours on Request

Size	ROPE DIA (mm)	Thickness Cordura® Guard (mm)	Standard Length (cm)	ROPE DIA (inch)	Thickness Cordura® Guard (inch)	Standard Length (Feet)
A	24-36	1,5	365	1"—1-1/2"	1/16"	12,00
B	40-52	1,5	365	1-5/8"—2-1/8"	1/16"	12,00
C	56-64	1,5	365	2-1/4"—2-5/8"	1/16"	12,00
D	68-80	1,5	365	2-3/4"—3-1/4"	1/16"	12,00




POLYESTER GUARD ▶ FISHING ROPES



CORDURA® GUARD ▶ FISHING ROPES

LE-1 BAND WEBBING SLING

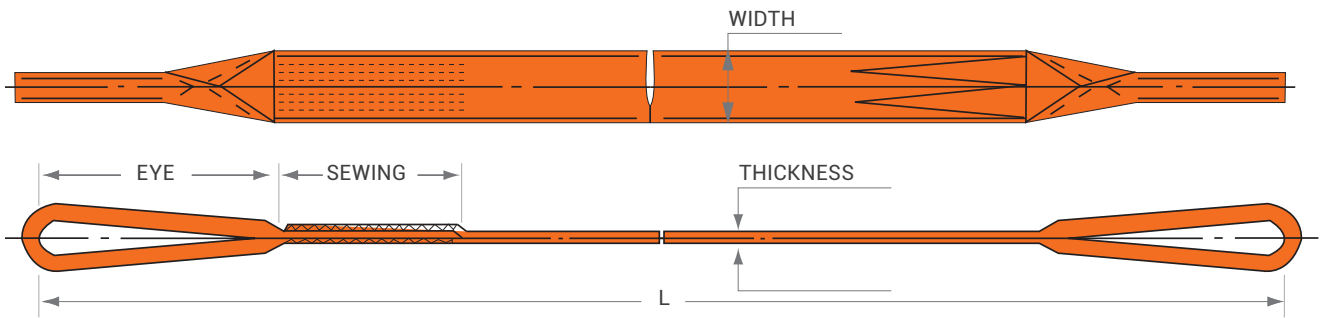

SPECIFICATIONS


Material : 100% HT Polyester Webbing
Standard : EN 1492-1+A1
Safety Factor : 7:1

BENEFITS / FEATURES

High quality product with the 7:1 safety factor
Produced from the high strength polyester webbing
Various sizes available for every application
Not slippery
High resistance to chemical and oil contamination
Custom made slings for specific applications may be made to customer specifications
Various colour are available




	Width (mm)	Working Load (kgf 100%)	Working Load (kgf 80%)	Working Load (kgf 200%)	Angle (0-45°) Working Load (kgf)	Angle (45-60°) Working Load (kgf)	Breaking Load (kgf)	Working Load (kgf)	Length (m)
VIOLET	30-50	1000	800	2000	1400	1000	7000	1000	1-10
GREEN	70	2000	1600	4000	2800	2000	14000	2000	2-10
YELLOW	90	3000	2400	6000	4200	3000	21000	3000	2-10
GRAY	120	4000	3200	8000	5600	4000	28000	4000	4-10
RED	150	5000	4000	10000	7000	5000	35000	5000	4-10
BROWN	180	6000	4800	12000	8400	6000	42000	6000	4-10
BLUE	250	8000	6400	16000	11200	8000	56000	8000	5-10
ORANGE	300	10000	8000	20000	14000	10000	70000	10000	5-10

- 
1. Flat eye
- 
2. Reversed eye
- 
3. Folded eye 1/2 width from 1 side
- 
4. Folded eye 1/2 width from 2 sides
- 
5. Folded eye 1/3 width

	0° 100%		60° 85%
	30° 95%		90° 75%
	45° 90%		120° 50%

LE-2 ROUND WEBBING SLING

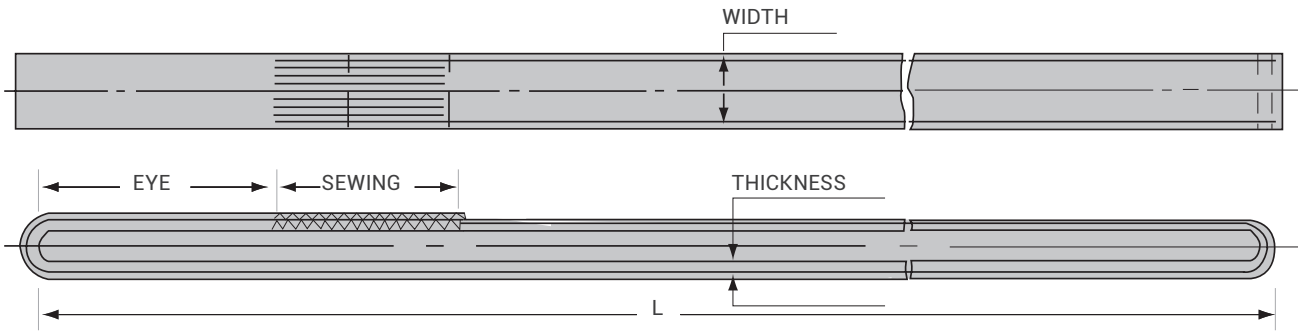


SPECIFICATIONS

Material : 100% HT Polyester Webbing
Standard : EN 1492-2+A1
Safety Factor : 7:1

BENEFITS / FEATURES

- High quality product with the 7:1 safety factor
- Produced from the high strength polyester webbing
- Various sizes available for every application
- Not slippery
- High resistance to chemical and oil contamination
- Custom made slings for specific applications may be made to customer specifications
- Various colour are available

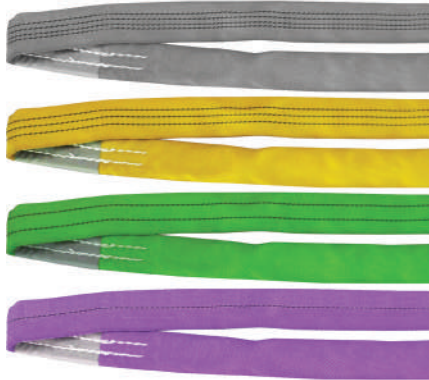


	Width (mm)	Working Load (kgf 100%)	Working Load (kgf 80%)	Working Load (kgf 200%)	Angle (0-45°) Working Load (kgf)	Angle (45-60°) Working Load (kgf)	Breaking Load (kgf)	Working Load (kgf)	Length (m)
VIOLET	25	1000	800	2000	1400	1000	7000	1000	1-10
GREEN	50	2000	1600	4000	2800	2000	14000	2000	2-10
YELLOW	75	3000	2400	6000	4200	3000	21000	3000	2-10
GRAY	100	4000	3200	8000	5600	4000	28000	4000	4-10
RED	125	5000	4000	10000	7000	5000	35000	5000	4-10
BROWN	150	6000	4800	12000	8400	6000	42000	6000	4-10
BLUE	200	8000	6400	16000	11200	8000	56000	8000	5-10
ORANGE	250	10000	8000	20000	14000	10000	70000	10000	5-10

	0° 100%		60° 85%
	30° 95%		90° 70%
	45° 90%		120° 50%

SUGGESTED MOORING ROPES FOR VARIOUS CLASSES OF VESSELS

PASSANGER VESSELS , RO-RO, CAR-CONTANIER CARRIERS		DYNE® K / FORCE K®	LUPA® ROUND	LUPP® SQUARE FILM	PP NORMAL	LUPA® SQUARE
		Ø				
DWT	3.-5.000 DWT	22	44	48	56	44
	5.-12.000 DWT	24	48	52	60	48
	12.-25.000 DWT	26	52	56	64	52
	25.-40.000 DWT	28	56	60	72	56
	40.-80.000 DWT	32	60	64	76	60
	ABOVE 80.000 DWT	36	64	68	80	64
BULKCARRIERS, TANKERS		DYNE® K / FORCE K®	LUPA® ROUND	LUPP® SQUARE FILM	PP NORMAL	LUPA® SQUARE
		Ø				
DWT	5.-10.000 DWT	24	44	48	56	44
	10.-20.000 DWT	26	48	52	60	48
	20.-40.000 DWT	32	52	56	64	52
	40.-80.000 DWT	36	56	60	72	56
	80.-150.000 DWT	38	60	64	76	60
	150.-250.000 DWT	40	64	68	80	64
	ABOVE 250.000 DWT	44	68	72	88	68


SUGGESTED MOORING & ANCHOR LINE FISH FARMING

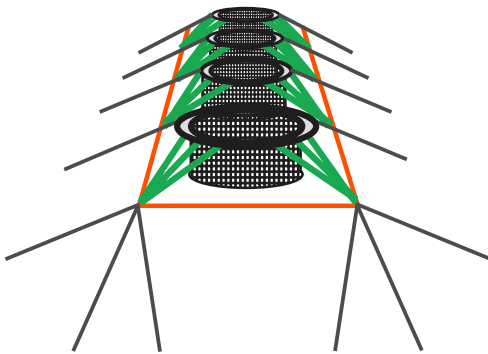

- Ø20 MM – Ø36 MM
LUPA® ROUND / SQUARE / TWIST
(SINKING) POLYAMIDE FIBER
- Ø36 MM – Ø40 MM
LUPA® ROUND / SQUARE / TWIST
(SINKING) POLYAMIDE FIBER
- Ø40 MM – Ø56 MM
LUPP® SQUARE FILM
(FLOATING) POLYOLEFIN FIBER

NOTE: ROPE DIAMETERS MENTIONED ABOVE CHANGE ACCORDING TO SIZE OF FISHFARMS.
THEREFORE, MINIMUM AND MAXIMUM VALUES ARE USED.

ROPE LENGTH ACCORDING TO DIAMETER & REEL SIZE

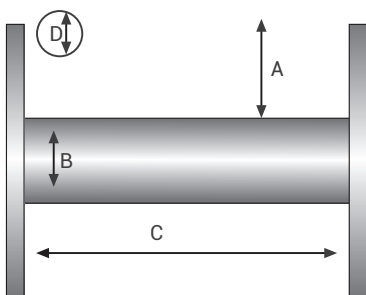

ROPES LENGTH (METER) :
$$\frac{(A+B)*A*C*\pi*10^6}{D^2}$$

A,B,C: (METER) : D: (MM)

CONVERSION TABLE

	TO CONVERT	MULTIPLY BY	TO CONVERT	MULTIPLY BY
WEIGHT	POUNDS TO GRAMS	453592	GRAMS TO POUNDS	0,002205
	POUNDS TO KILOGRAMS	0,4536	KILOGRAMS TO POUNDS	2,20462
	TONS TO KILOGRAMS	1016,05	KILOGRAMS TO TONS	0,0009842
	POUNDS TO OUNCES	16	OUNCES TO POUNDS	0,0625
	POUNDS/100 FEET TO GRAMS/METERS	14,8816394	GRAMS/METERS TO POUNDS / 100 FEET	67,0969
STRENGTH	KILOGRAMS TO KILONEWTONS	0,0098	KILONEWTONS TO KILOGRAMS	101,972
	TONS TO NEWTONS	9810	NEWTONS TO TONS	0,000102
LENGTH	INCHES TO MILLIMETERS	25,40	MILLIMETERS TO INCHES	0,03937
	FEET TO METERS	0,3048	METERS TO FEET	3,208
	FEET TO INCHES	12	INCHES TO FEET	0,833
	YARDS TO METERS	0,9144	METERS TO YARDS	1,0936
	YARDS TO FEET	3	FEET TO YARDS	0,333
	MILES TO KILOMETERS	1,6093	KILOMETERS TO MILES	0,6214
	CIRC. INCHES TO DIAMETER MILLIMETERS	8	DIAMETERS MILLIMETERS TO CIRC. INCHES	0,125
AREA	SQUARE FEET TO SQUARE METERS	0,0929	SQUARE METERS TO SQUARE FEET	10,7639
	SQUARE YARDS TO SQUARE METERS	0,8361	SQUARE METERS TO SQUARE YARDS	1,1960
TEX-SYSTEM	DENIER	WT. ING/9000M	TEX TO DTEX	10
	TEX	WT. ING/1000M	DEN TO TEX	0,111
	DTEX	WT. ING/10.000M	CN/DTEX	GR/DEN



STANDARDS OF ROPES

EN ISO 9554	Fibre Ropes - General Specifications
EN ISO 1968	Fibre Ropes and Cordage - Vocabulary
EN ISO 2307	Fibre Ropes - Determination of Certain Physical and Mechanical Properties
EN ISO 1140	Fibre Ropes - Polyamide - 3, - 4 and - 8 Strand Ropes
EN ISO 1141	Fibre Ropes - Polyester - 3, - 4 and - 8 Strand Ropes
EN ISO 1346	Fibre Ropes - Polypropylene - 3, - 4 and - 8 Strand Ropes
EN ISO 1181	Fibre Ropes - Manila and Sisal - 3,- 4 and - 8 Strand Ropes
ISO 10547	Polyester Fibre Ropes - Double Braid Construction
ISO 10554	Polyamide Fibre Ropes - Double Braid Construction
ISO 10572	Mixed Polyolef in Fibre Ropes
ISO 10325	Fibres Ropes - High Modulus Polyethylene - 8 Strand Braided Ropes, 12 Strand Braided Ropes and Covered Ropes
ISO 10556	Fibres Ropes of Polyester/Polyolef in Dual Fibres
EN 1891	Personel Protective Equipment for The Prevention of Falls From A Height - Low Stretch Kernmantel Ropes
EN 892	Mountaineering Equipment - Dynamic Mountaineering Ropes - Safety Requirements and Test Methods
EN 564	Mountaineering Equipment - Accessory Cord - Safety Requirements and Test Methods

STANDARDS OF ROPES

MIL-DTL 24050E	Polyamide Fibre Ropes - Double Braid Construction
----------------	---

STANDARDS OF SLINGS

EN 1492-1+A1	Textile Slings - Safety - Part 1: Flat Woven Webbing Slings, Made of Man - Made Fibers for General Purpose Use
EN 1492-2+A1	Textile Slings - Safety - Part 2: Roundslings, Made of Man - Made Fibers for General Purpose Use

QUALITY - TEST

Kaya Ropes manufactures all kinds of ropes with technical specifications that are suitable for all kind of conditions & ropes made for a specific field with international quality certifications also offering a wide range of construction type and raw materials for every field where the safety of human life and property is of prime concern.

For certain type of products, Kaya Ropes has the type approval and inspection certificates from Turk Loydu. Additionally, Kaya Ropes offers inspection certificates from DNV-GL and Bureau Veritas upon special request from their clients.







AUGUST HERZOG
Maschinenfabrik GmbH & Co.Kg
AM Alexanderhaus 160 26127
Oldenburg Germany
Phone: +49 (0)441 3008 0
Fax: +49 (0)441 3008 100
E-mail: info@herzog-online.com
www.herzog-online.com



GALAN TEXTILE MACHINERY S.L.
Francesc Oller, 91 E-08225
Terrassa (Barcelona) Spain
Phone: +34 93 733 65 50
Fax: +34 93 788 40 40
E-mail: galan@galan.es
www.galan.es



TWISTECHNOLOGY
Ctra. de Rubí, km 22. E-08228
Terrassa (Barcelona) Spain
Phone: +34 937 894 100
Fax: +34 937 894 355
E-mail: info@twisttechnology.com
www.twisttechnology.com



ROBCO ENGINEERING A/S
Kjeldgaardsvej 6
9300 Saeby Denmark
Phone: +45 98 46 40 00
Fax: +45 98 46 18 00
E-mail: info@robco-eng.com
www.robco-eng.com



SIMA GROUP
Via Chiesaccia, 2 40056
Crespellano (BO) Italy
Phone: +39 0516505511
Fax: +39 051739588
E-mail: simagroup@simagroup.it
www.simagroup.it



ZWICK GMBH & CO. KG
August-Nagel-Str. 11 D-89079
Ulm Germany
Phone: +49 (0)7305 10 0
Fax: +49 (0)7305 10 200
E-mail: info@zwick.de
www.zwick.de



DSM DYNEEMA B.V.
6129 El Urmond The Netherlands
Phone: +31 (0)46 4767989
Fax: +31 (0)46 4767915
E-mail: info.dyneema@dsm.com
www.dyneema.com



TEIJIN ARAMID B.V.
Velperweg 76 P.O. Box 5153
6802 ED Arnhem The Netherlands
Phone: +31 0 88 26 89 159
Fax: +31 0 88 26 89 179
E-mail: ropes_cables@teijinaramid.com
www.teijinaramid.com



NEXIS FIBERS AG
Gerliswilstrasse 17 6021
Emmenbrücke Switzerland
Phone: +41 (0)41 267 80 53
Fax: +41 (0)41 267 92 16
www.nexisfibers.com



I-COATS N.V.
I-Coats N.V. K. Mercierlei 29
2600 Berchem Belgium
Phone: +32 3 281 73 03
Fax: +32 3 281 73 04
E-mail: kvg@i-coats.be
www.i-coats.be

KAYA HALAT AŞ

Yönetim ve Üretim Merkezi
Management & Production Center

Gebze Organize Sanayi Bölgesi,
1000. Sokak No: 1015
Çayırova, Kocaeli, Turkey
kayagrubu.com.tr

Santral/Central
T: +90 262 677 19 19 pbx
F: +90 262 677 19 10



KAYA ROPES

Gebze Organize Sanayi Bölgesi,
1000. Sokak No: 1015
Çayırova, Kocaeli, Turkey
T: +90 262 677 19 03 pbx
F: +90 262 677 19 01
info@kayaropes.com
kayaropes.com

KAYA ROPES USA
KAYA USA LLC
2701 NW 2nd Ave. #205
Boca Raton Florida, 33431
United States Of America
T: +1 561 303 57 63
info@kayausa.us
kayaropes.com/en-US/

/KayaRopes
 /in/kayaropes
 /KayaRopes
 /KayaRopes